

X5-ASSEMBLE INSTRUCTIONS



1. Cut the carton tape with scissors and take out the inner and outer cartons in the direction of the arrow marked on the carton



2. Take out the parts fixed on the whole vehicle and the packaging iron frame, and wait for the subsequent installation



3. Tools required for disassembly, packaging and installation of the whole vehicle



4. The parts shown in the figure need to be subsequently installed on the whole vehicle



5. The parts of the accessory box are shown in the figure. Before assembly, please read the instructions and follow the steps above to install the vehicle



6. Use 8# 9# tools to remove the bolts that fix the packing iron frame



7. Using 13# tool cut the iron wire fixed the dirt bike



8. Using 5# 12# tool disassemble the front axle and put the front axle and spacer to next using



9 .Put the dirt bike body on work chair and fix stably



10. Using 11# tool fix and lock the bottom riser and bracket of Ignition Switch with 4pcs screws



11. Using 11# tool fix the handle bar with 4pcs screws, make spacers of both ends equilly between graph marks



12. Using 1# tool put 2pcs screws on the above of front dender, don't lock tightly



13. Using 1# tool lock 2pcs screws on the bottom of front fender tightly, and lock the screws on graph 12



14. Using 9# 12# tools assemble front wheel and lock screws of front axle tightly




15. Using 10# tool pry the brake pads apart



16. Using 2# assemble the front brake caliper, put the brake pad on brake dis, lock tightly with 2pcs screws



17. Using 9# tool assemble the Rear Suspension and Triangle Lever Linkage,lock the screws tightly

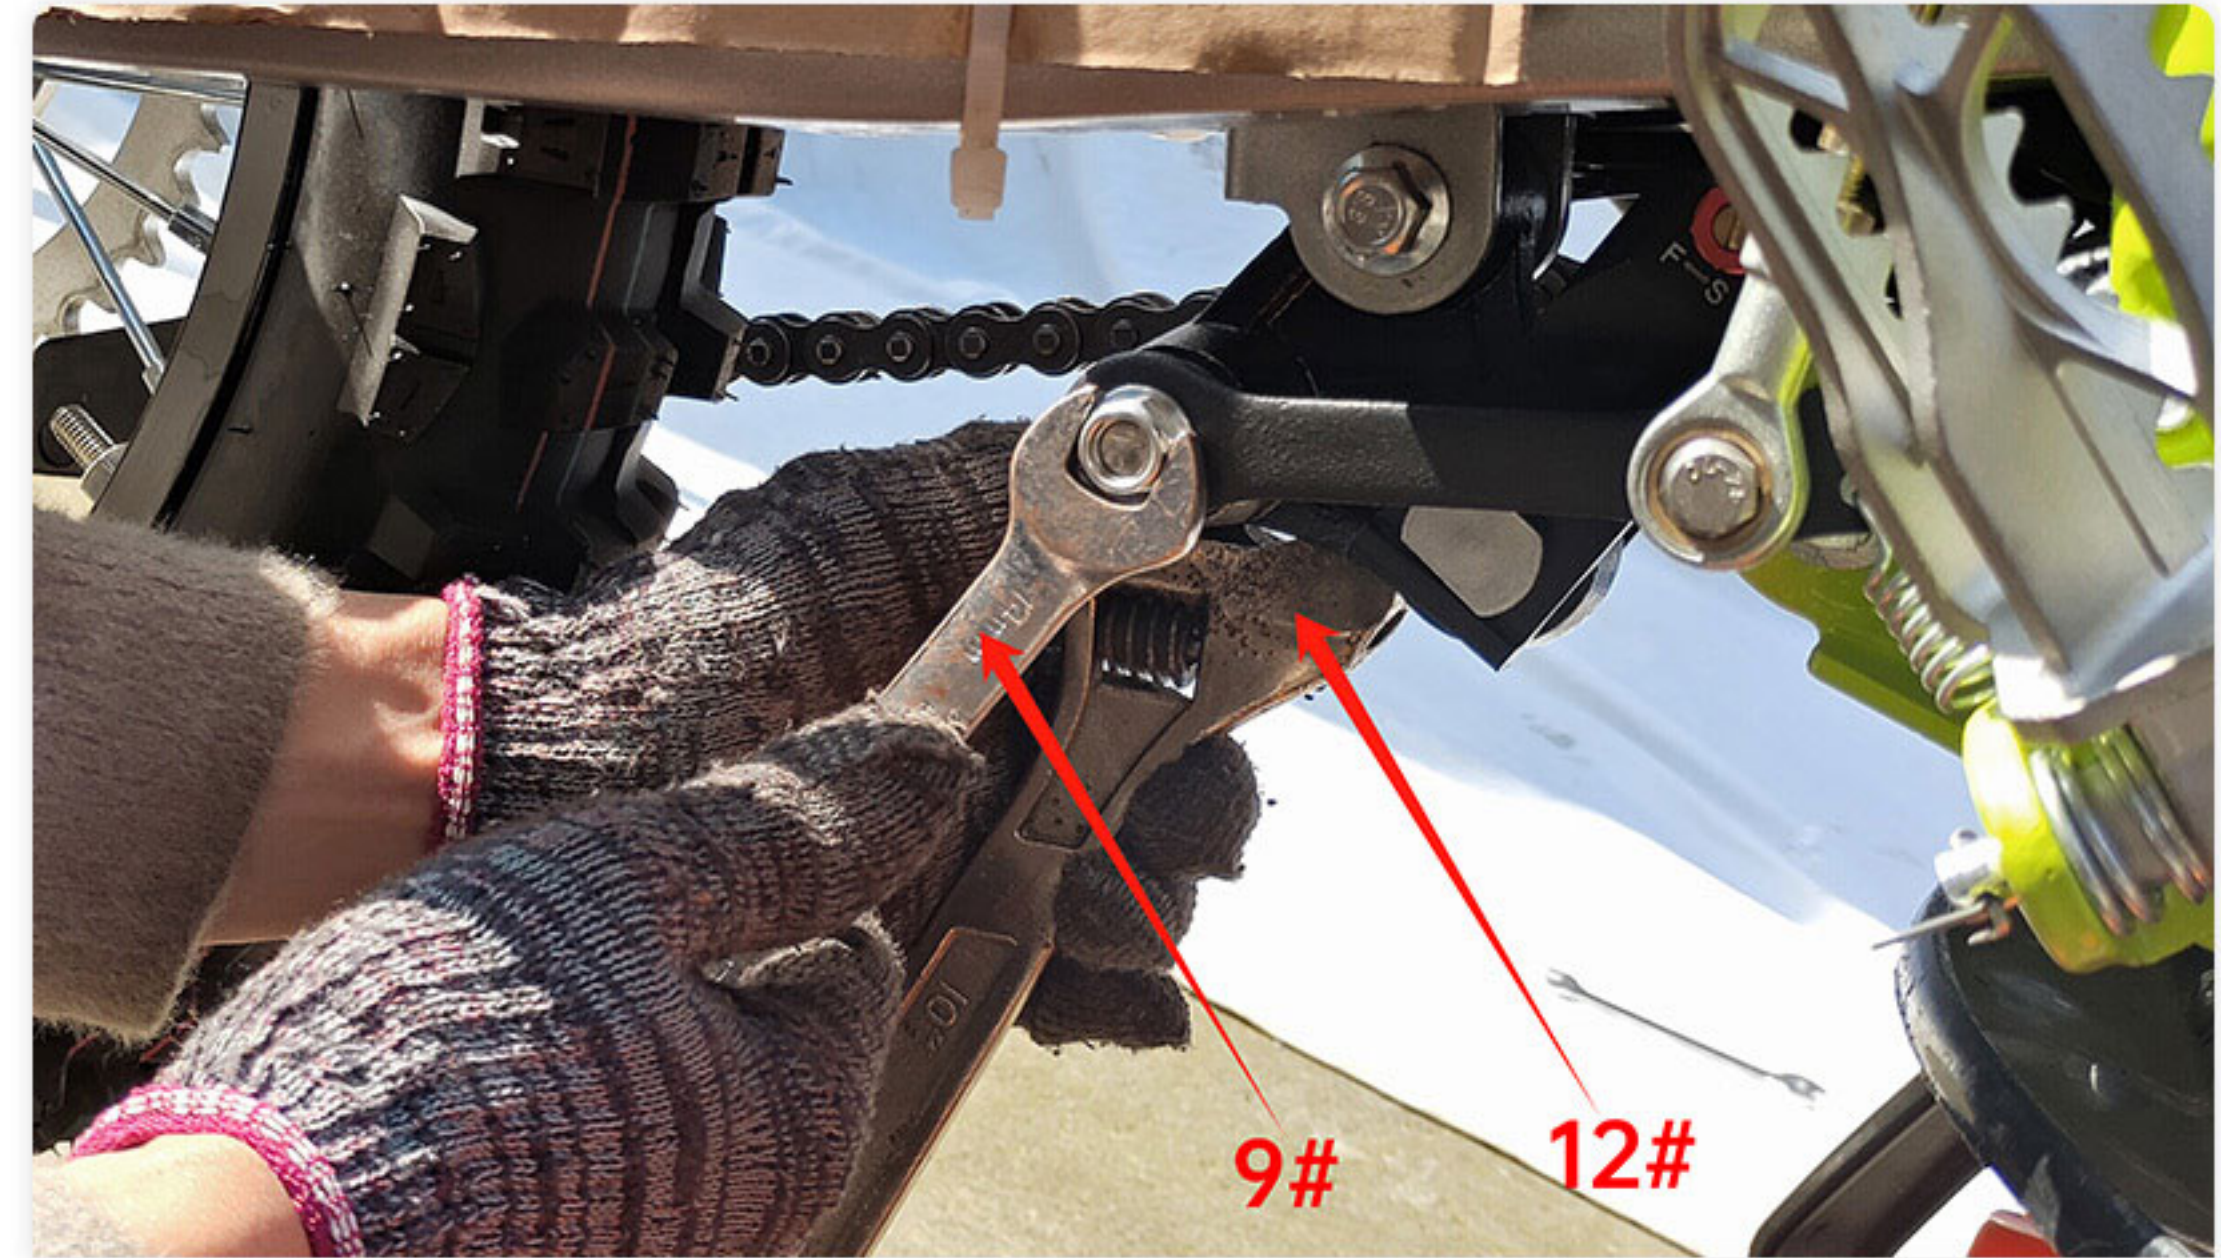

18. Using 9# 12# tool assemble Linkage Arm and Triangle Lever Linkage,lock the screws tightly



19.Using 2# tool disassemble the screw fixed on seat and open it.



20. Using 3# 4# tool assemble left and tank covers




21. Using 1# 6# tool fix the cover with its bracket, lock the screws tightly




22. Using 7# tool connect the screws on battery as graph



23. Assemble seat, fix and lock the screws of seat using 2# tool

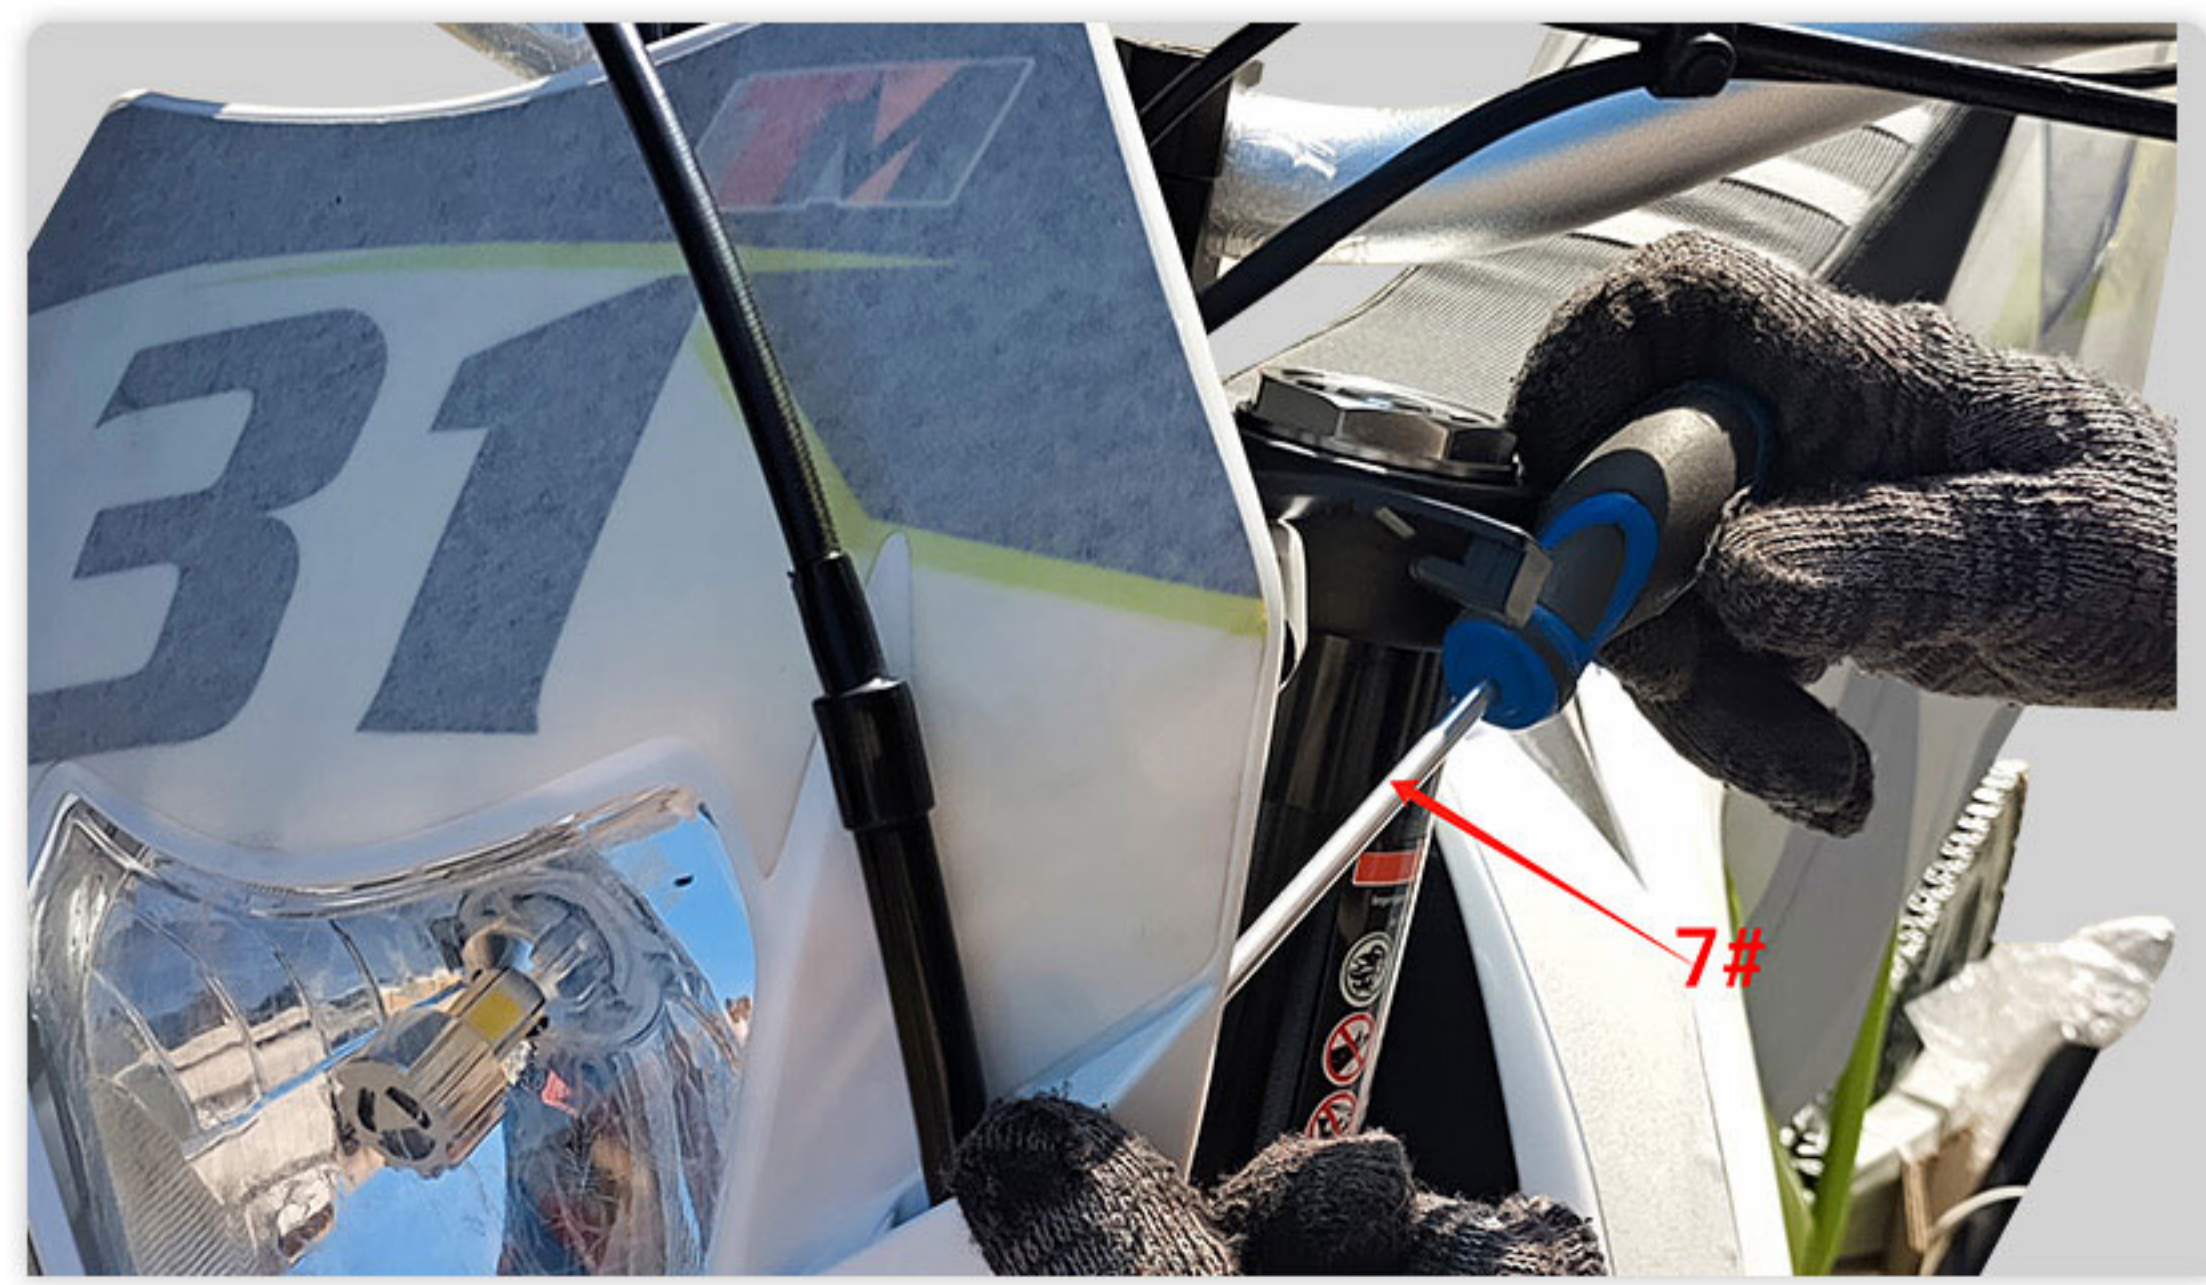

24. Assemble the front brake hose and bracket on headlight Using 7# tool

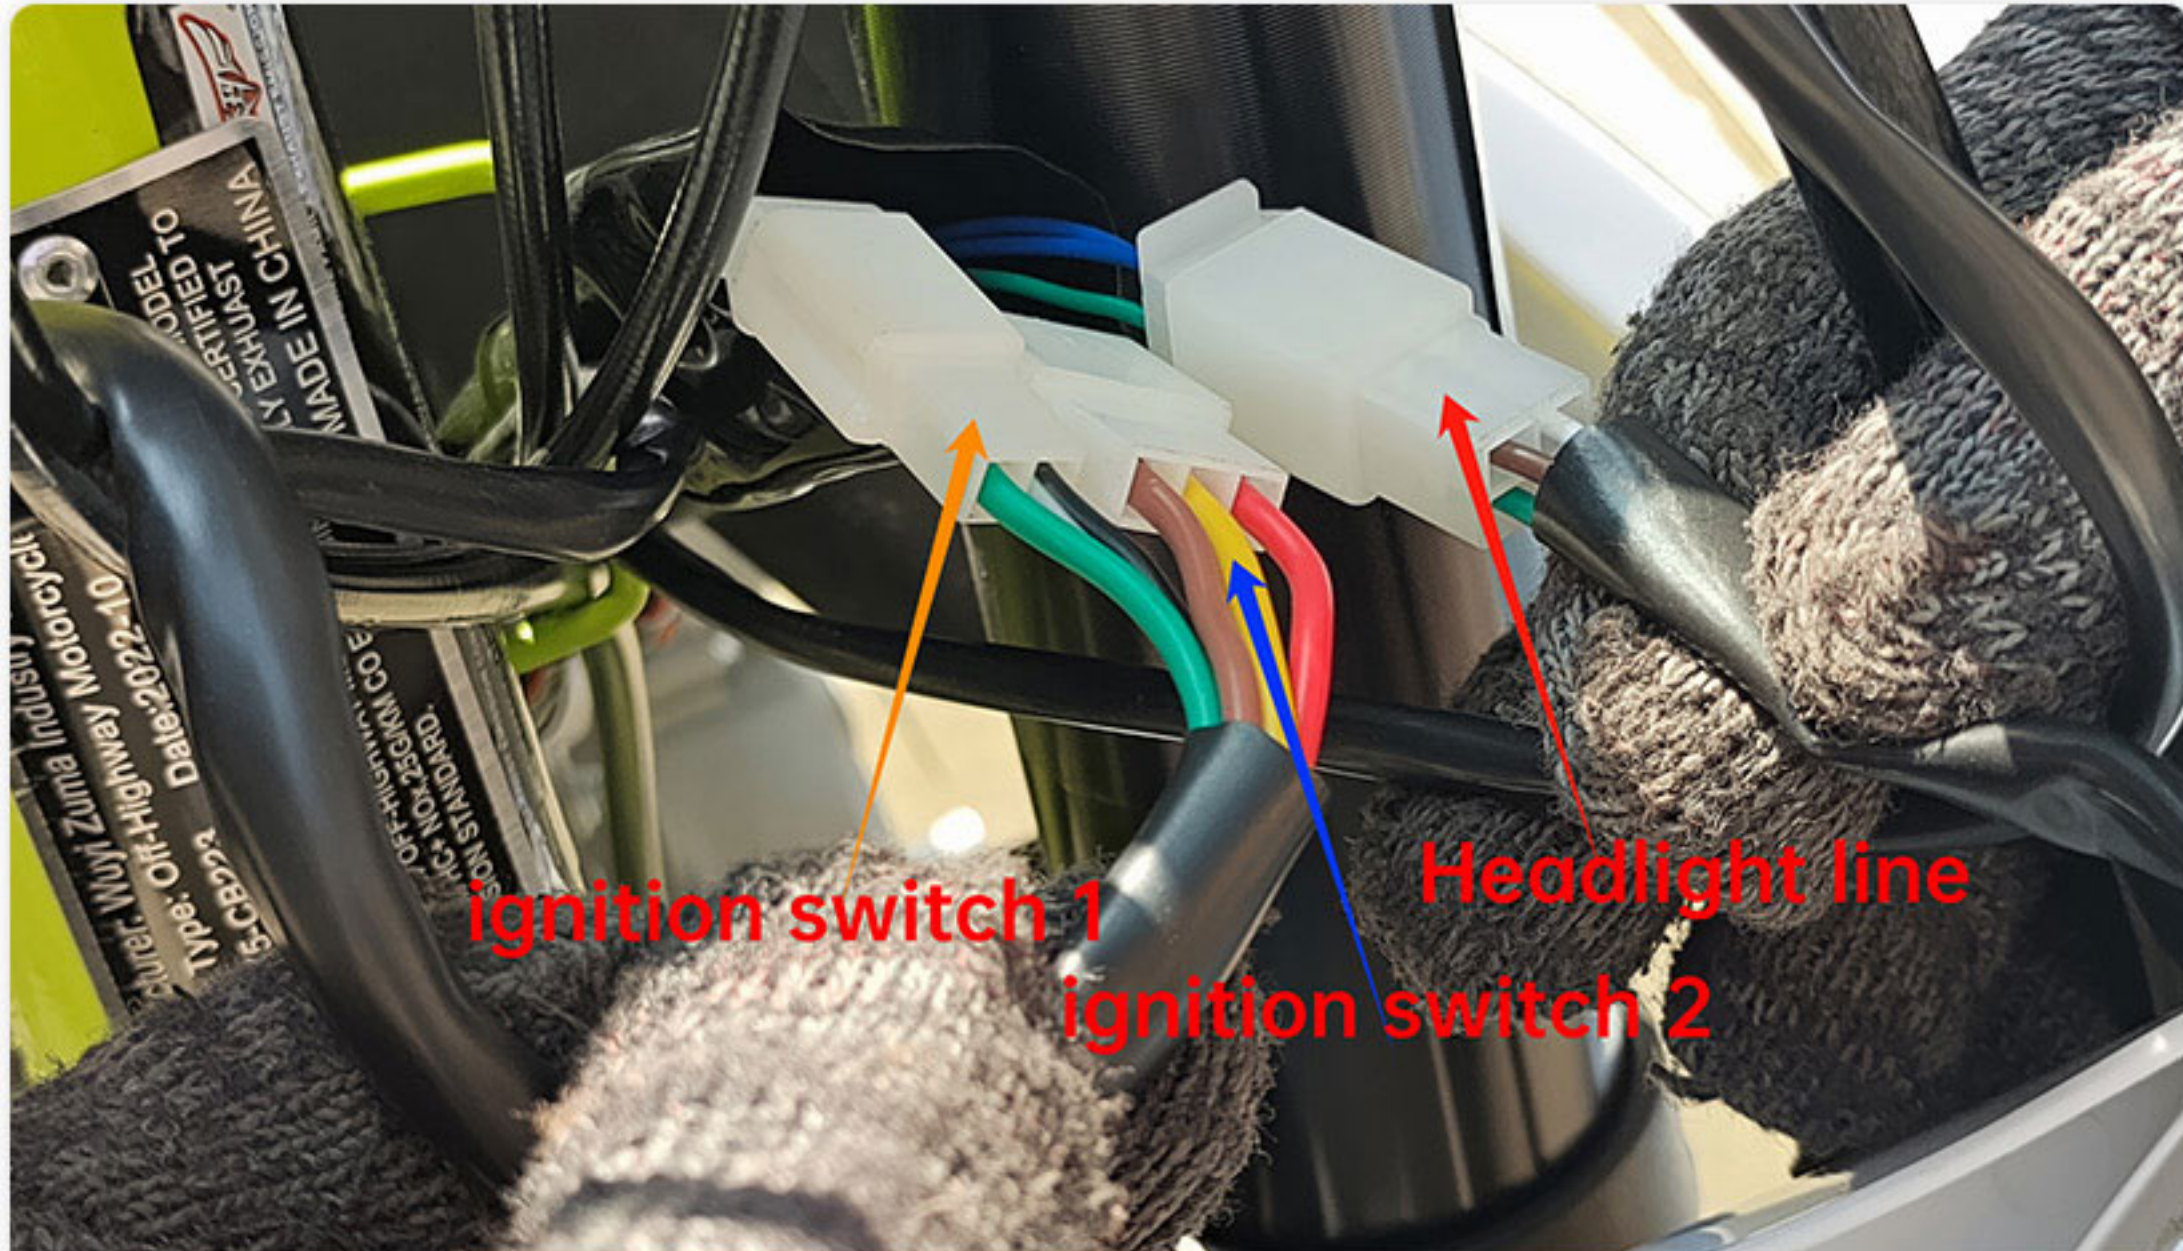

25. plug the ignition switch and wire harness as graph



26. buckle the headlight and front fender, fix them on front shock with belt



27. Assemble breath hose, protect pad, fix the wires on clip



28. open the filter tap, finish assembling.